



### Description of heating tape

Self-regulating  
 4 power output ranges  
 Cut-to-length  
 Economical solution for freeze protection

### Technical data

Maximum exposure temperature (unpowered): 85°C  
 Maximum operating temperature: 65°C  
 Nominal voltage: 230 V  
 Min. bending radius: 35 mm  
 Min. installation temperature: -30°C

Name	Power output on insulated metal pipes at 10°C (W/m)	Maximum permissible temperature (°C)	Nominal Dimension mm
eHeat Pipe 10	10	85	11 x 6.5
eHeat Pipe 16	16	85	11 x 6.5
eHeat Pipe 25	25	85	11 x 6.5
eHeat Pipe 30	30	85	11 x 6.5

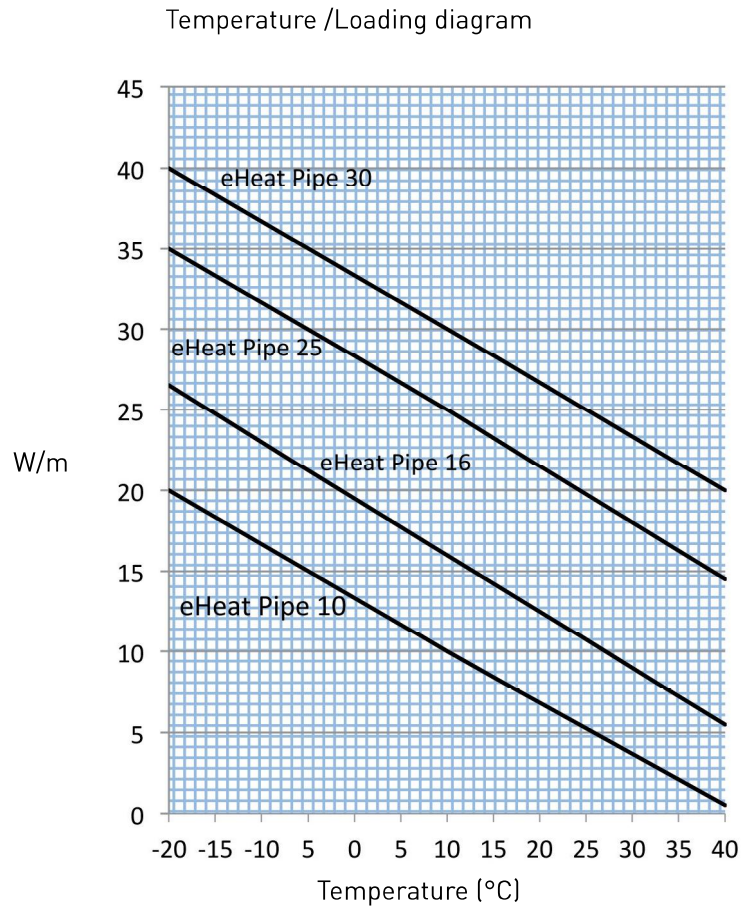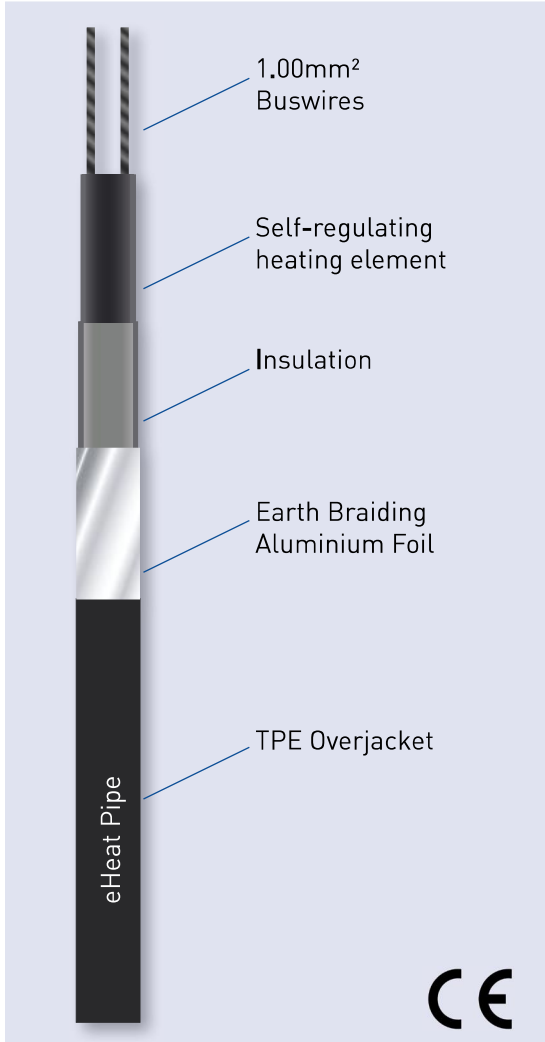

Maximum recommended length of heating circuit at 230VAC using Type-C circuit breakers:

Product Reference	Circuit Breaker	Start up Temperature			
		+10°C	0°C	-10°C	-20°C
10W	16A	122	122	110	99
	20A	135	135	122	110
	30A	150	150	135	122
16W	16A	106	102	96	88
	20A	118	109	101	97
	30A	126	118	112	106
25W	16A	92	88	74	59
	20A	103	97	89	70
	30A	118	106	98	88
30W	20A	70	74	64	56
	30A	97	89	78	69